# CorkSport Performance

## **AXO-8-010 License Plate Relocation Kit**

Installation Instructions for the CorkSport Performance License Plate Relocation Kit for the 2019+ Mazda 3

Written By: Cody Dunton



This document was generated on 2022-03-09 09:45:10 AM (MST).

#### INTRODUCTION

In this installation guide we have provided step by step instructions to install the CorkSport Performance License Plate Relocation Kit.

## TOOLS:

- Medium Phillips Head Screwdriver (1)
- 10mm Socket-Deep (1)
- Small Flathead Screwdriver (1)
- 3/8" Ratchet (1)
- 17mm Socket Deep (1)
- 1/4" Bit Driver (1)
- Wrench, 19mm (1)

## PARTS:

- CorkSport License Plate Bracket (1)
- CorkSport AXO Tow Hook Screw (1)
- CorkSport 19mm Wrench (1)
- M12x20mm Stainless Steel Hex Head Bolt (1)
- M12 Stainless Steel Washer (1)
- Security Hex Bit (1)
- Security Hex Screws (4)
- 1/4" Bumper Plugs (2)



This document was generated on 2022-03-09 09:45:10 AM (MST).

## Step 1 — Getting Started



- First and foremost; THANK YOU for becoming a part of the CorkSport Family. We hope to bring you the highest level of Parts, Customer Service, & Support
- instruction format will relate colored marking in the image to the color dot in the text to the right of the image

#### Step 2 — Remove the License Plate and OEM Bracket







- Start by removing the License Plate using a Phillips screwdriver or 10mm socket and ratchet.
- Using a 10mm socket and ratchet, remove the two bolts holding on the OEM License Plate Bracket.
- Optional: If you would like to plug the holes that were used to secure the OEM bracket, use a 1/4" drill bit to enlarge the holes to fit the included plastic plugs.
  - ↑ Drilling the holes will require new hardware to be used if you want to return to using the OEM License Plate Bracket in the future

This document was generated on 2022-03-09 09:45:10 AM (MST).

© 2022 Page 3 of 8

#### Step 3 — Hatch - Locate and Remove the Tow Hook Cover



- The following steps are for Hatchback Mazda 3's
  - Locate the Tow Hook Cover that is on the left side of the grill.
  - Using a flat head screwdriver, gently push down the tab on the inside of the cover, while prying outwards.
  - Once the tab has been released remove the Tow Hook Cover.

### Step 4 — Sedan - Locate and Remove the Tow Hook Cover




- The following steps are for Sedan Mazda 3's
  - Locate the Tow Hook Cover that is on the left side of the grill.
  - Using a flat head screwdriver, gently push up on the two tabs on the inside of the cover, while prying outwards.
  - Once the bottom tabs have been released remove the Tow Hook Cover by gently pulling outwards to remove the two top tabs.

This document was generated on 2022-03-09 09:45:10 AM (MST).

© 2022 Page 4 of 8


## Step 5 — Install the CorkSport Tow Hook Screw

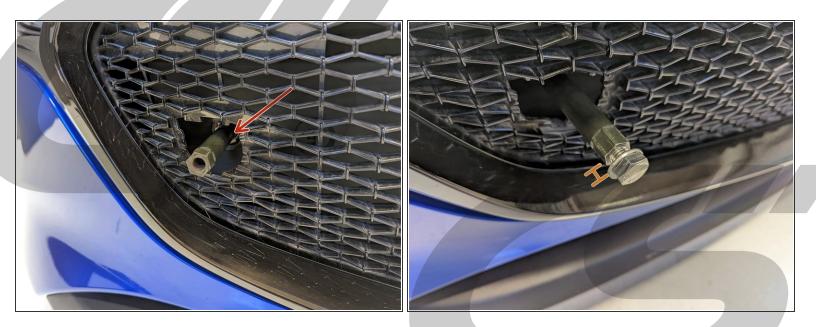

- Install the Tow Hook Screw using a 17mm socket and ratchet to 45 ft-lbs.
- Now install the Stainless Steel 19mm Bolt and Washer into the Tow Hook Stud, leaving ~ 1/4" of room between the Washer and Tow Hook Screw.



## Step 6 — Install the License Plate onto the CorkSport Bracket

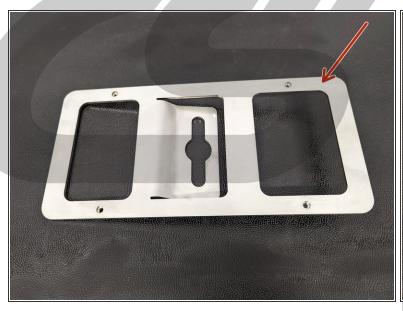



- Place the CorkSport License Plate Bracket on a flat surface as shown.
  - (i) The right side of the bracket should be off the surface.
- Place your License Plate on the bracket and install the 4 security hex screws using a 1/4" bit driver and the included security bit until they are snug.



© 2022 Page 6 of 8

#### Step 7 — Place the License Plate on the Standoff







- Line up the large hole in the License Plate Bracket with the bolt and washer and slide over the head of the bolt.
- Let the License Plate Bracket sit on the bolt as shown.
- Tighten down the bolt using either the included wrench or another 19mm wrench until the License Plate Bracket is snug, but can still be rotated by hand.

## Step 8 — Level the License Plate



- Rotate the license plate bracket until it is level on the car and tighten down the 19mm bolt until it is tight.
- if parked on a flat surface you can place a level on top of the license plate to properly align it.

This document was generated on 2022-03-09 09:45:10 AM (MST).

© 2022 Page 7 of 8

## **Step 9** — **Installation Complete**



- This completes your installation of the CorkSport Performance License Plate Relocation Kit!
  - i Check the License Plate Bracket after driving to ensure that it remains tight.
- Contact us with any questions or concerns at sales@corksport.com or (360) 260-2675.
- Please leave a review here: https://corksport.com
- Share your experience using #CorkSport on Instagram,
  Facebook, and Twitter.



This document was generated on 2022-03-09 09:45:10 AM (MST).